

DLC Display Co., Limited

德爾西顯示器有限公司



MODEL No: DLC0700XDP21LF-C-1

TEL: 86-755-86029824

FAX: 86-755-86029827

E-MAIL: sales@dlcdisplay.com

WEB: www.dlcdisplay.com



Record of Revision

Date	Revision No.	Summary
2019-01-26	1.0	Rev 1.0 was issued

1. Scope

This data sheet is to introduce the specification of DLC0700XDP21LF-C-1, active matrix TFT module. It is composed of a color TFT-LCD panel, driver ICs, FPC, capacitive touch panel and a backlight unit. The 7.0" display area contains 1024(RGB) x 600 pixels.

As to basic specification of the driver IC, refer to the IC specification and datasheet.


2. Application

Digital equipments which need color display, mobile navigator/video systems.

3. General Information

Item	Contents	Unit
Size	7.0	inch
Resolution	1024(RGB) x 600	/
Interface	LVDS	/
Technology type	IPS TFT	/
Pixel Configuration	R.G.B. Stripe	
Outline Dimension (W x H x D)	164.90 x 100.00 x 5.65	mm
Active Area	154.21 x 85.92	mm
Backlight Type	LED	/
Controller/ driver	HX8282A11 & HX8696A	/
Driver IC of CTP	FT5426	/
Backlight Type	LED	/
Weight	TBD	g

4. Outline Drawing

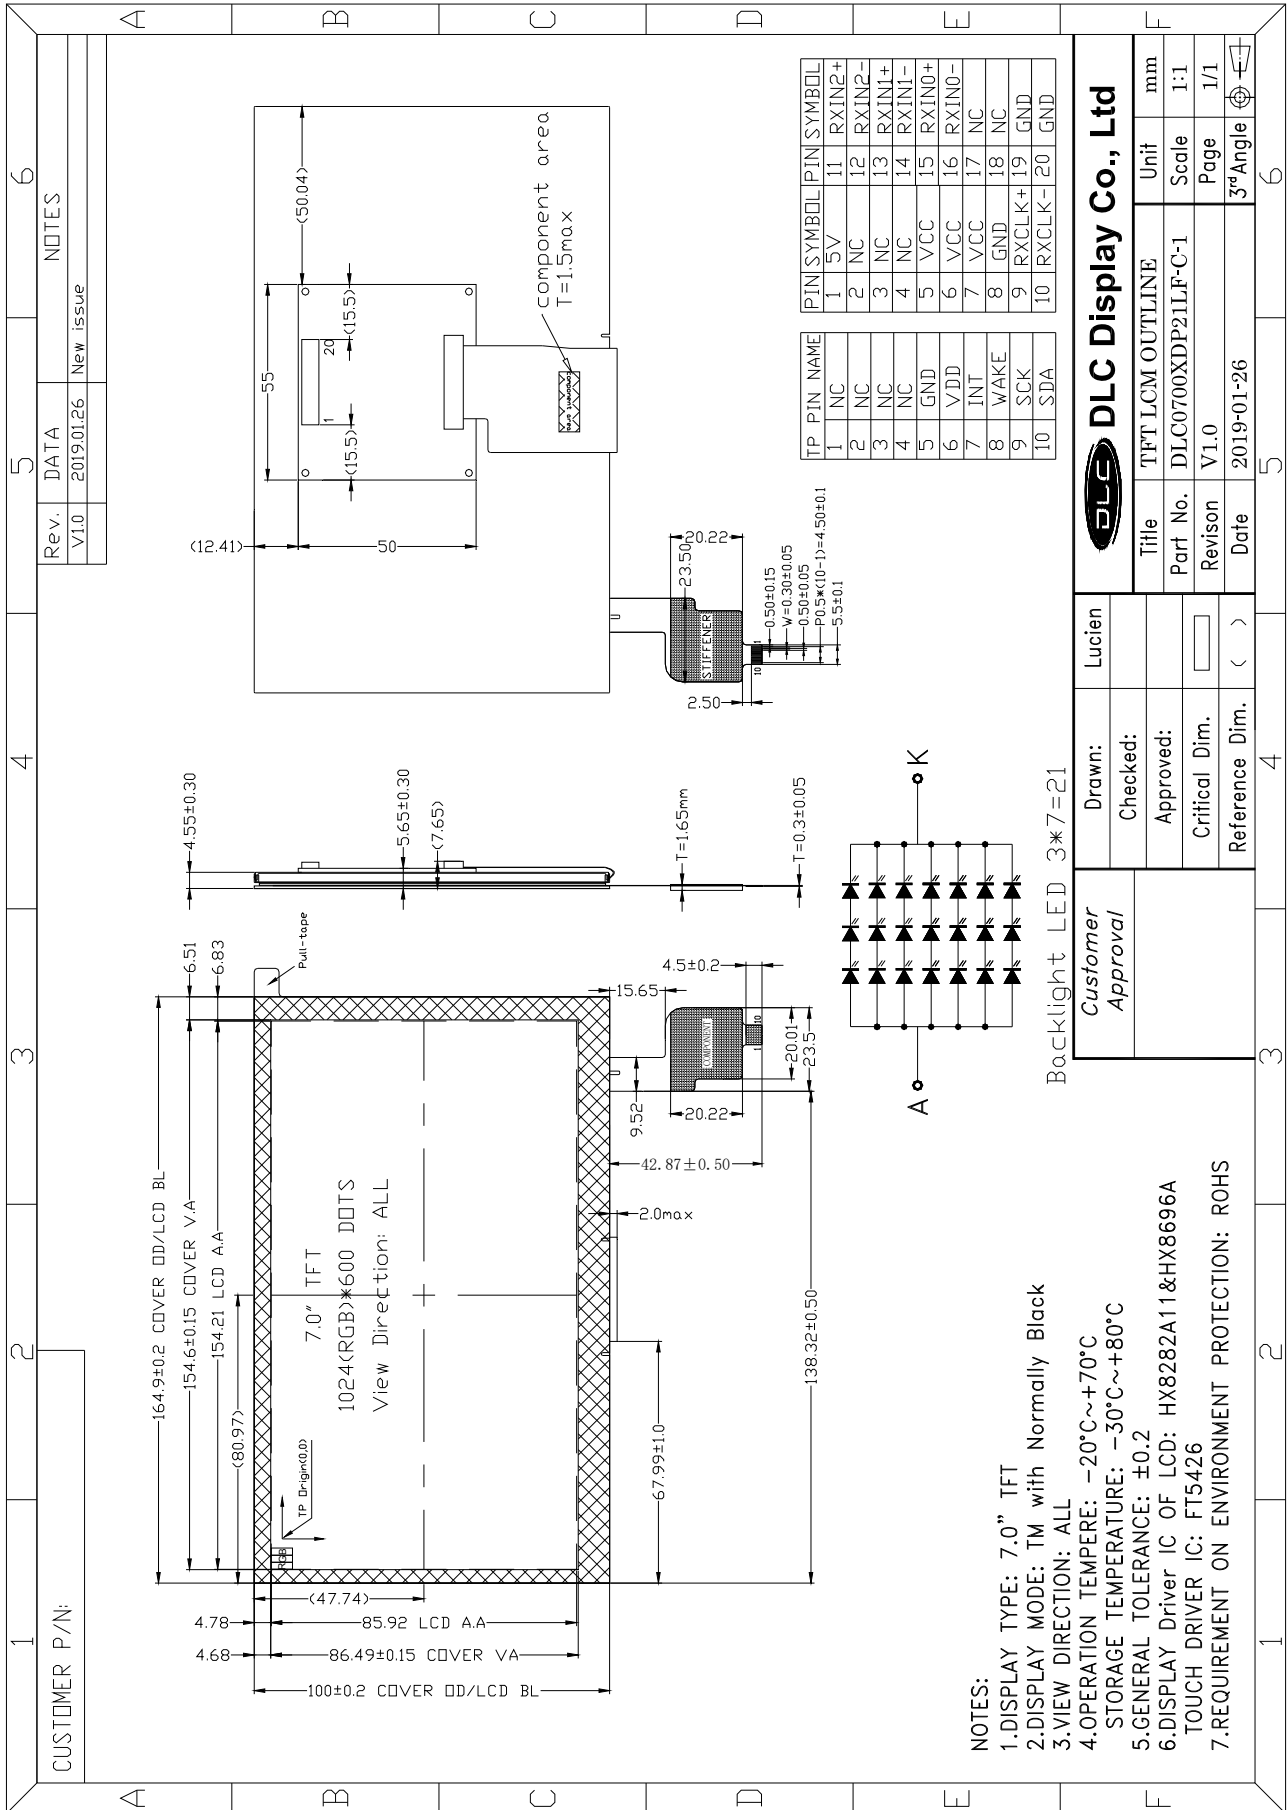

5. Interface signals

No	Symbol	Description	Remarks
1	5V	+5.0V for backlight	
2	NC	Not connection	
3	NC	Not connection	
4	NC	No connection	
5	VCC	+5.0V	
6	VCC	+5.0V	
7	VCC	+5.0V	
8	GND	Ground	
9	RXCLK+	-LVDS differential clock input	
10	RXCLK-	-LVDS differential clock input	
11	RXIN2+	+LVDS differential data input	
12	RXIN2-	-LVDS differential data input	
13	RXIN1+	+LVDS differential data input	
14	RXIN1-	-LVDS differential data input	
15	RXIN0+	+LVDS differential data input	
16	RXIN0-	-LVDS differential data input	
17	NC	No connection	
18	NC	No connection	
19	GND	Ground	
20	GND	Ground	

Note: Connector: A1007WR-S-20P

CTP Interface Signal:

No	Symbol	Description	Remarks
1	NC	No connection	
2	NC	No connection	
3	NC	No connection	
4	NC	No connection	
5	GND	Power ground.	
6	VDD	Power supply	
7	INT	Interrupt output Pin	
8	RST	Reset pin	
9	SCK	I ² C clock signal.	
10	SDA	I ² C data signal	

Note: Recommend connector Part No.: FH12-10S-0.5SH

6. Absolute maximum Ratings

6.1. Electrical Absolute max. ratings

Parameter	Symbol	MIN	MAX	Unit	Remark
Power Supply Voltage	VCC	-0.3	8.0	V	

6.2. Environment Conditions

Item	Symbol	MIN	MAX	Unit	Remark
Operating Temperature	TOPR	-20	70	°C	
Storage Temperature	TSTG	-30	80	°C	

Note1: The response time will become lower when operated at low temperature.

Note2: Background color changes slightly depending on ambient temperature. The phenomenon is reversible.

7. Electrical Specifications

7.1 Electrical characteristics

GND=0V, Ta=25°C

Item	Symbol	MIN	TYP	MAX	Unit	Remark
Power Supply	VCC	-	5.0	-	V	
Current Consumption	I _{CC}	-	250	-	mA	Normal mode

Note1: When an optimum contrast is obtained in transmissive mode.

Note2: Tested in 8X6 chessboard pattern.

7.2 LED Backlight

Ta=25°C

Item	Symbol	MIN	TYP	MAX	Unit	Remark
Forward Current	IL	-	140		mA	
Forward Voltage	VL	-	9.6	-	V	Note1
LED life time	--	--	25,000	--	Hr	Note2

Note1: The LED Supply Voltage is defined by the number of LED at Ta=25°C and IL =140mA.



Note2: The "LED life time" is defined as the module brightness decrease to 50% original brightness at Ta=25°C and IL =140mA. The LED lifetime could be decreased if operating IL is larger than 140mA.

8. Command/AC Timing

8.1 AC Electrical Characteristics


Parameter	Symbol	Spec			Unit	Condition
		Min.	Typ.	Max.		
Clock Frequency	RXFCLK	20	-	71	MHz	
Input data skew margin	TRSKM	500	-	-	pS	VID =400mV RXVCM=1.2V RXFCLK=71MHz
Clock high time	TLVCH	-	$4/(7 \cdot \text{RXFCLK})$	-	ns	-
Clock low time	TLVCL	-	$3/(7 \cdot \text{RXFCLK})$	-	ns	-
PLL wake-up time	TenPLL	-		150	us	-

Table: LVDS mode AC electrical characteristics

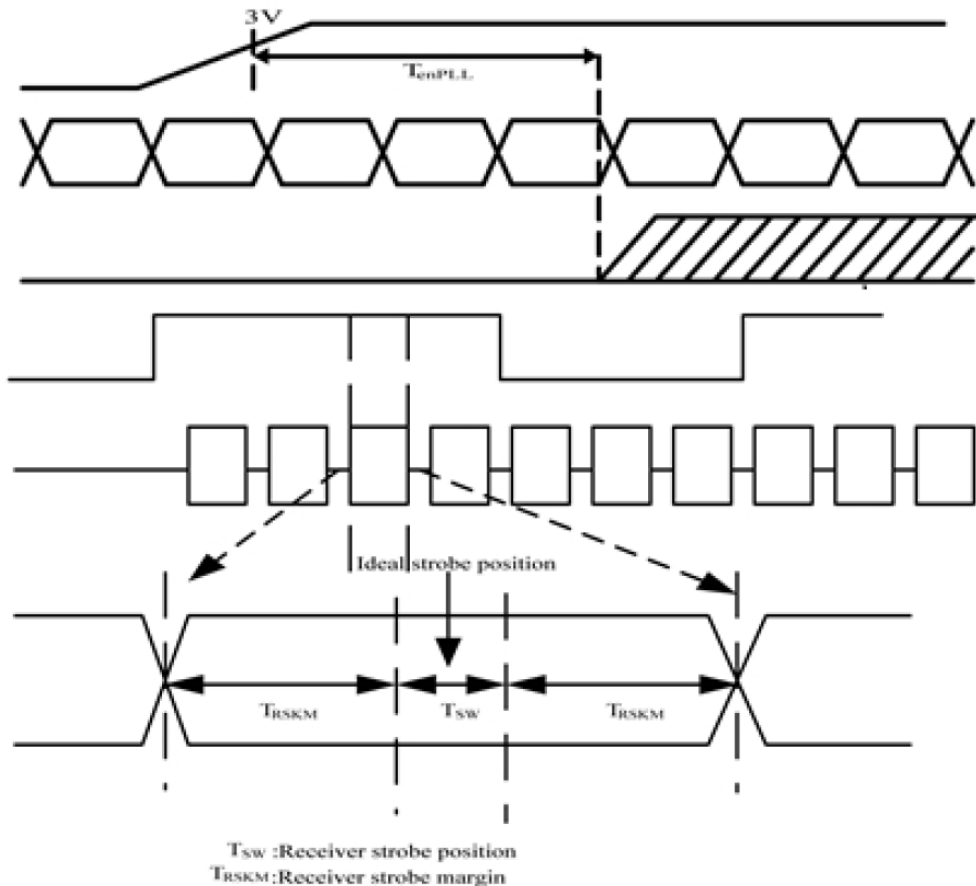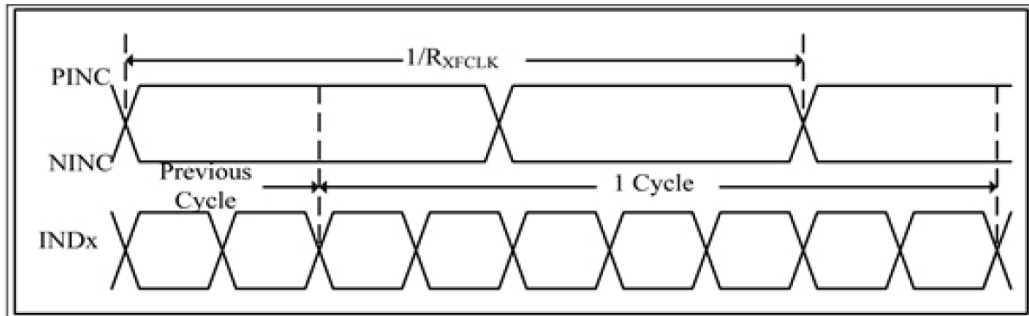


8.3. LVDS DC Characteristic

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Differential input high threshold voltage	RxVTH	-	-	+0.1	V	RxVCM=1.2V
Differential input low threshold voltage	RxVTL	-0.1	-	-	V	
Input voltage range(single-end)	RxVIN	0	-	2.4	V	
Differential input common mode voltage	RxVCM	IVIDI/2	-	2.4-IVIDI/2	V	
Differential input voltage	IVIDI	0.2	-	0.6	V	
Differential input leakage current	RxVTH	-10	-	+10	V	
LVDS digital operating current	Iddlvds	-	40	50	mA	Fclk=65MHz VDD=3.3V
LVDS digital standby current	Istlvds	-	10	50	uA	Clock & all functions are stop

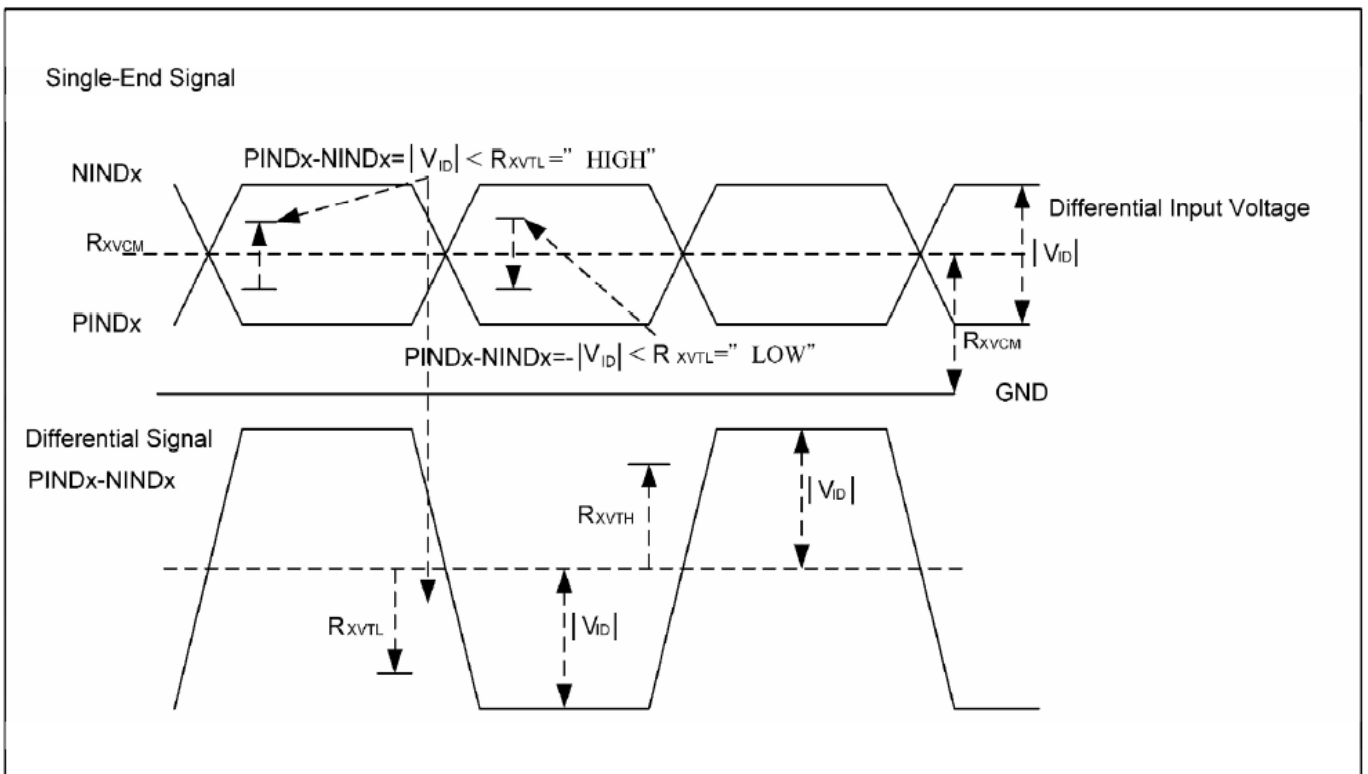


8.3. Power ON/OFF Sequence

In order to prevent IC from power on reset fail, the rising time (TPOR) of the digital power supply VDD should be maintained within the given specifications. Refer to "AC Characteristics" for more detail on timing.

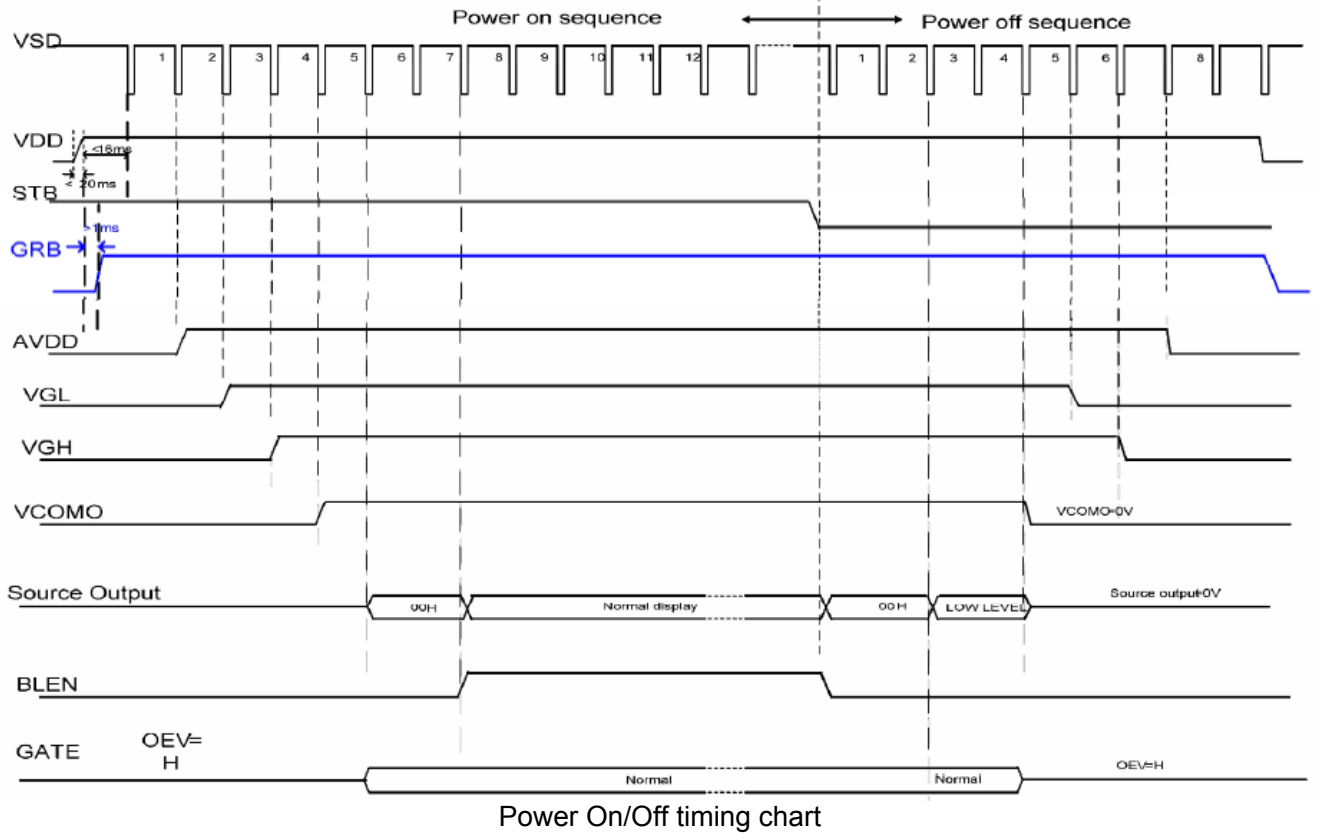

Power On/Off timing chart

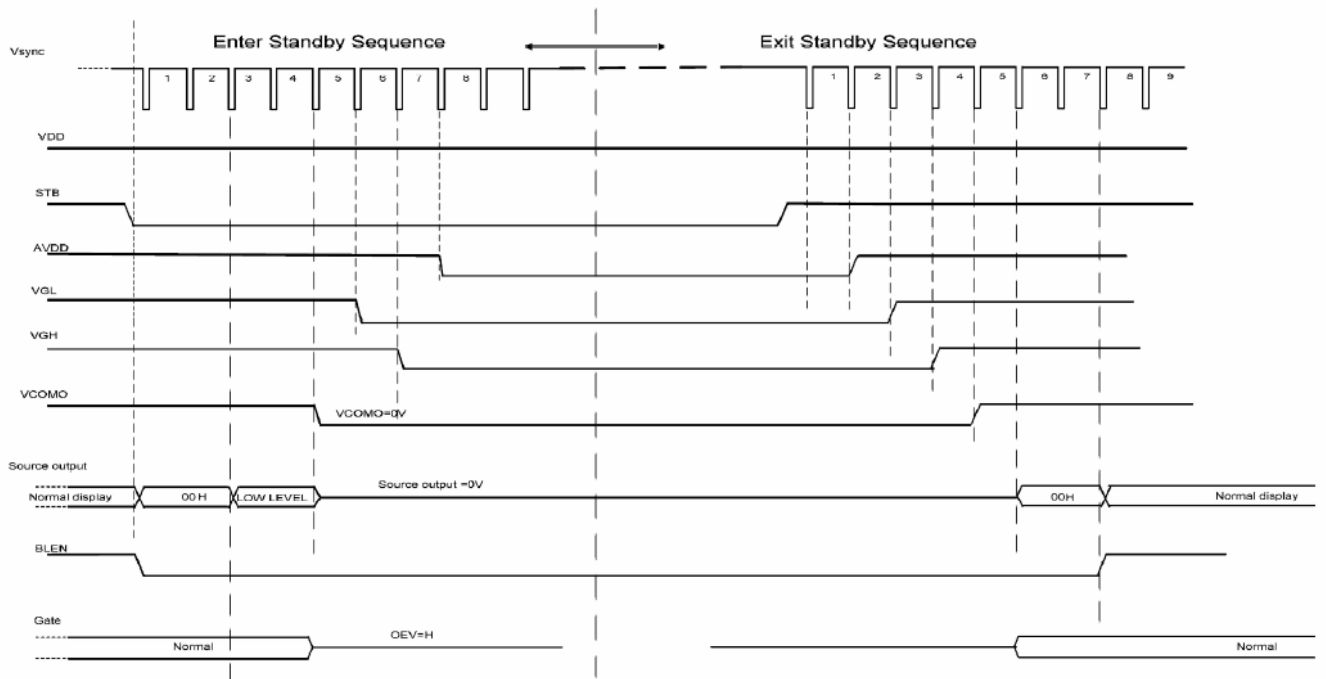

Enter and Exit standby Mode timing chart

Note: Low level=3Fh, when NBW=L (Normally white)
 Low level=00h, when NBW=H (Normally black)

9. Optical Specification


Ta=25°C

Item	Symbol	Condition	Min	Typ.	Max.	Unit	Remark		
Contrast Ratio	CR	$\theta=0^\circ$	500	800	-		Note1 Note2		
Response Time	Tr+Tf	25°C	-	25	40	ms	Note1 Note3		
View Angles	ΘT	$CR \geq 10$	80	85	-	Degree	Note 4		
	ΘB		80	85	-				
	ΘL		80	85	-				
	ΘR		80	85	-				
Chromaticity	White	Brightness is on	Typ-0.03	Typ+0.03			Note5, Note1		
								x	0.303
	y							0.333	
	Red							x	0.618
								y	0.326
	Green							x	0.285
								y	0.539
	Blue							x	0.146
y		0.148							
Luminance	L		170	220	-	cd/m2	Note1 Note6		
Uniformity	U		75	80	-	%	Note1 Note7		

Note 1: Definition of optical measurement system.

Temperature = 25°C(±3°C)

LED back-light: ON, Environment brightness < 150 lx

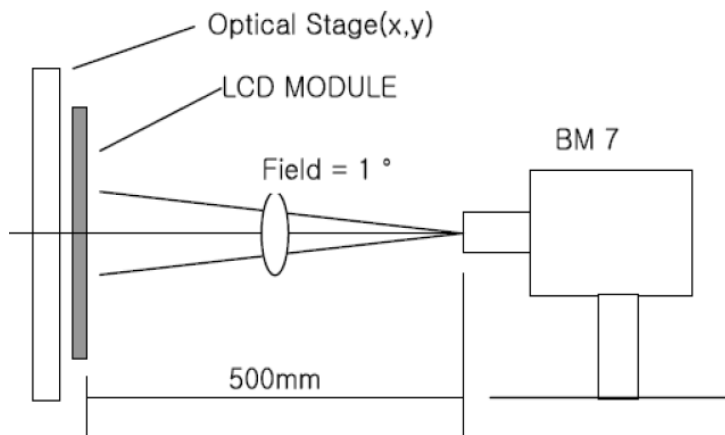


Note 2: Contrast ratio is defined as follow:

$$\text{Contrast Ratio} = \frac{\text{Surface Luminance with all white pixels}}{\text{Surface Luminance with all black pixels}}$$


Note 3: Response time is defined as follow:

Response time is the time required for the display to transition from black to white (Rise Time, T_r) and from white to black(Decay Time, T_f).

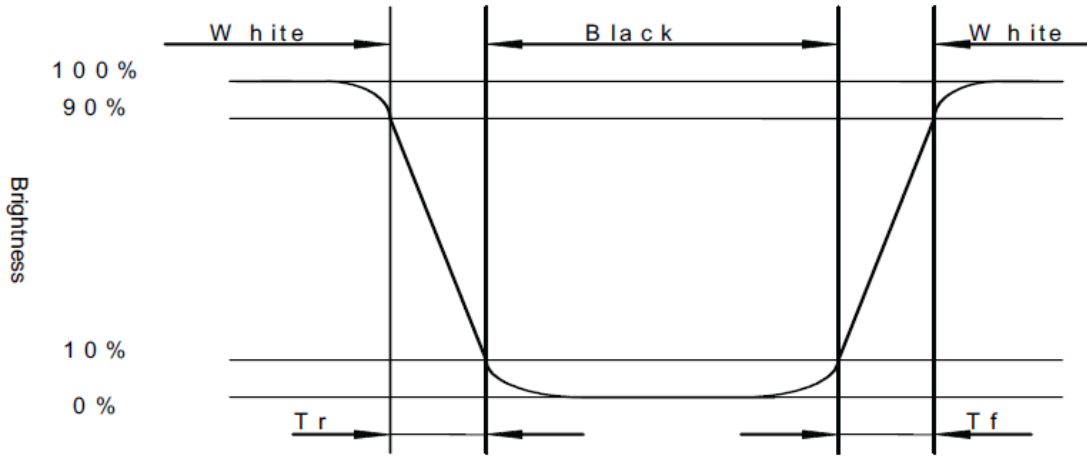


Note 4: Viewing angle range is defined as follow:

Viewing angle is measured at the center point of the LCD.

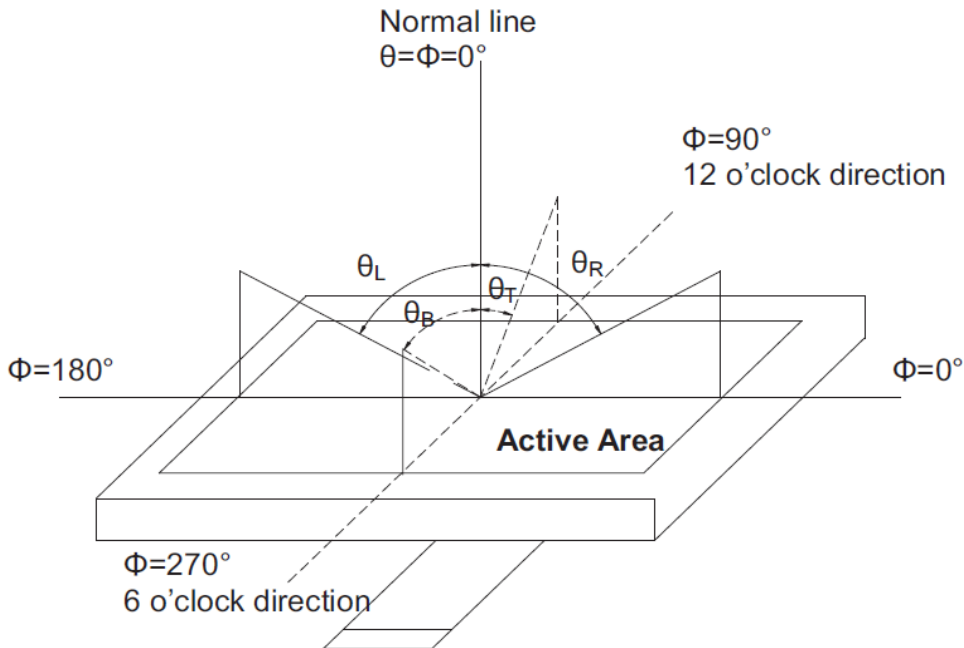

Note 5: Color chromaticity is defined as follow: (CIE1931)

Color coordinates measured at center point of LCD.

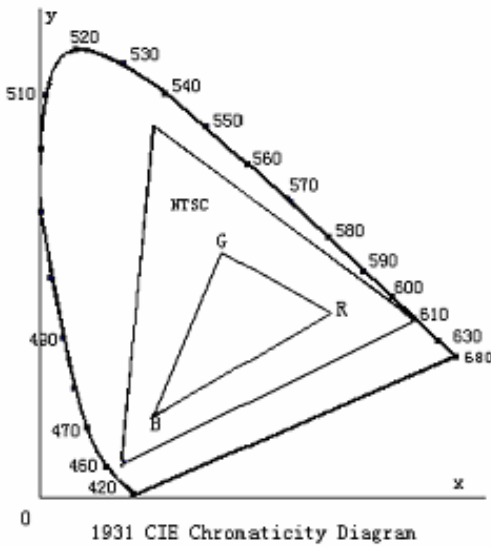

$$S = \frac{\text{area of RGB triangle}}{\text{area of NTSC triangle}} \times 100\%$$

Note 6: Luminance is defined as follow:

Luminance is defined as the brightness of all pixels “White” at the center of display area on optimum contrast.

Note 7: Luminance Uniformity is defined as follow:

Active area is divided into 9 measuring areas (Refer Fig. 2). Every measuring point is placed at the center of each measuring area.

$$\text{Uniformity (U)} = \frac{\text{Minimum Luminance(brightness) in 9 points}}{\text{Maximum Luminance(brightness) in 9 points}}$$

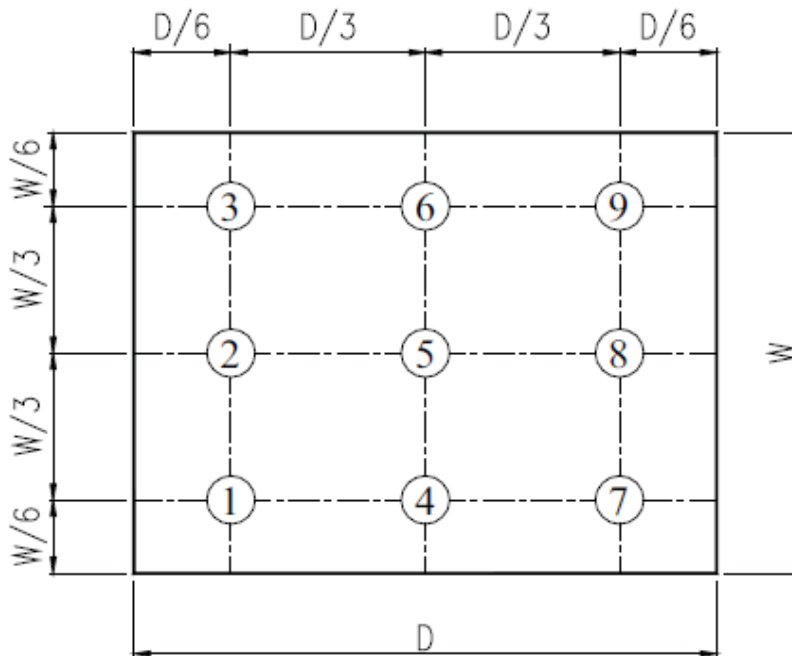


Fig. 2 Definition of uniformity

10. Environmental / Reliability Tests

No	Test Item	Condition	Judgment criteria
1	High Temp Operation	Ts=+70°C, 96hrs	Per table in below
2	Low Temp Operation	Ta=-20°C, 96hrs	Per table in below
3	High Temp Storage	Ta=+80°C, 96hrs	Per table in below
4	Low Temp Storage	Ta=-30°C, 96hrs	Per table in below
5	High Temp & High Humidity Storage	Ta=+60°C, 90% RH 96 hours	Per table in below (polarizer discoloration is excluded)
6	Thermal Shock (Non-operation)	-30°C 30 min~+80°C 30 min, Change time:5min, 5Cycles	Per table in below
7	ESD (Operation)	Air discharge:+/-8KV, Contact discharge:4KV	Per table in below
8	Vibration (Non-operation)	10Hz~150Hz, 100m/s ² , 120min	Per table in below
9	Shock (Non-operation)	Half- sine wave,300m/s ² ,11ms	Per table in below
10	Package Drop Test	Height:80 cm, 1 corner, 3 edges, 6 surfaces	Per table in below

INSPECTION	CRITERION(after test)
Appearance	No Crack on the FPC, on the LCD Panel
Alignment of LCD Panel	No Bubbles in the LCD Panel No other Defects of Alignment in Active area
Electrical current	Within device specifications
Function / Display	No Broken Circuit, No Short Circuit or No Black line No Other Defects of Display

11. Precautions for Use of LCD Modules

10.1 Safety

The liquid crystal in the LCD is poisonous. Do not put it in your mouth. If the liquid crystal touches your skin or clothes, wash it off immediately using soap and water.

10.2 Handling

- A. The LCD and touch panel is made of plate glass. Do not subject the panel to mechanical shock or to excessive force on its surface.
- B. Do not handle the product by holding the flexible pattern portion in order to assure the reliability
- C. Transparency is an important factor for the touch panel. Please wear clear finger sacks, gloves and mask to protect the touch panel from finger print or stain and also hold the portion outside the view area when handling the touch panel.
- D. Provide a space so that the panel does not come into contact with other components.
- E. To protect the product from external force, put a covering lens (acrylic board or similar board) and keep an appropriate gap between them.
- F. Transparent electrodes may be disconnected if the panel is used under environmental conditions where dew condensation occurs.
- G. Property of semiconductor devices may be affected when they are exposed to light, possibly resulting in IC malfunctions.
- H. To prevent such IC malfunctions, your design and mounting layout shall be done in the way that the IC is not exposed to light in actual use.

10.3 Static Electricity

- A. Ground soldering iron tips, tools and testers when they are in operation.
- B. Ground your body when handling the products.
- C. Power on the LCD module before applying the voltage to the input terminals.
- D. Do not apply voltage which exceeds the absolute maximum rating.
- E. Store the products in an anti-electrostatic bag or container.

10.4 Storage

- A. Store the products in a dark place at $+25^{\circ}\text{C} \pm 10^{\circ}\text{C}$ with low humidity (40% RH to 60% RH). Don't expose to sunlight or fluorescent light.
- B. Storage in a clean environment, free from dust, active gas, and solvent.

10.5 Cleaning

- A. Do not wipe the touch panel with dry cloth, as it may cause scratch.
- B. Wipe off the stain on the product by using soft cloth moistened with ethanol. Do not allow ethanol to get in between the upper film and the bottom glass. It may cause peeling issue or defective operation. Do not use any organic solvent or detergent other than ethanol.

10.6 Cautions for installing and assembling

- A. Bezel edge must be positioned in the area between the Active area and View area. The bezel may press the touch screen and cause activation if the edge touches the active area. A gap of approximately 0.5mm is needed between the bezel and the top electrode. It may cause unexpected activation if the gap is too narrow. There is a tolerance of 0.2 to 0.3mm for the outside dimensions of the touch panel and tail. A gap must be made to absorb the tolerance in the case and connector.
- B. In order to make the display assembly stable and firm, DLC recommends to design some supporting at the display backside, especially for the display with tape-attached touch panel, such supporting is important and essential, or else, the display may drop-off from front after some period of time.
- C. Do not display the fixed pattern for a long time because it may develop image sticking due to the LCD structure. If the screen is displayed with fixed pattern, use a screen saver.

